


ITEM	DESCRIPTION
1	DT21 D-STOP
2	DRIVE COUPLING, D-STOP
3	SOCKET COVER
4	ENGAGEMENT KEY

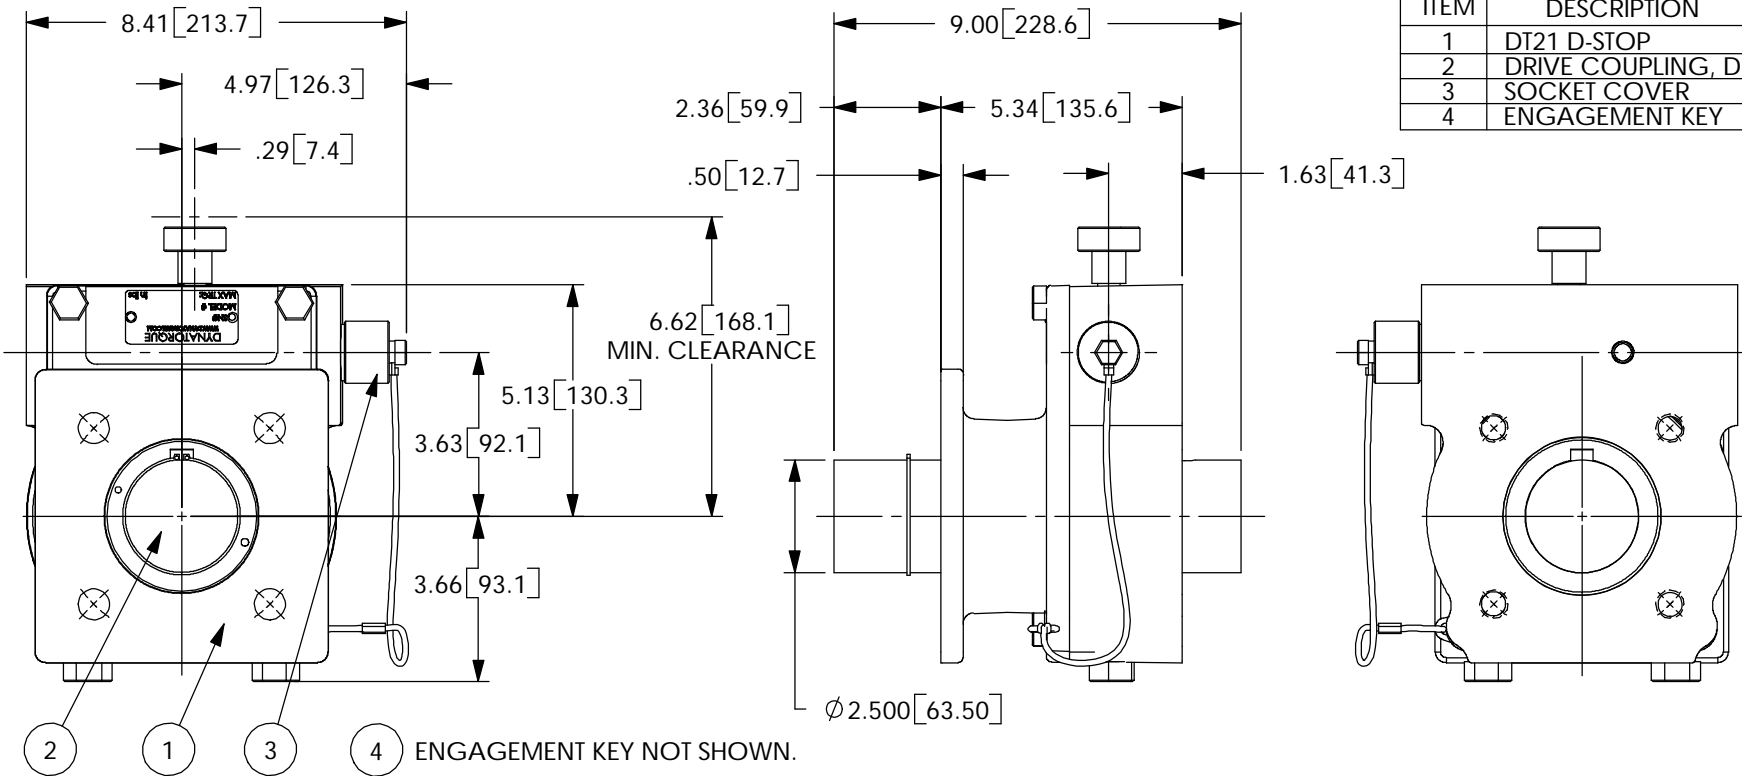

CONSULT FACTORY FOR SPECIAL CONFIGURATIONS.

STANDARD 20° TEST POSITION. SHOWN IN HOME POSITION.  GREASED FOR LIFE.  STANDARD STAINLESS STEEL SHAFT.  STANDARD STAINLESS STEEL ENGAGEMENT KEY.	<b>MAX DRIVE COUPLING BORE &amp; KEY</b>		CONSULT FACTORY FOR SPECIAL CONFIGURATIONS AND SWITCH MOUNTING OPTIONS	TORQUE: 26,000 IN LBS [2938 N-M] TEMPERATURE: -20° TO 150°F [-29° TO 66°C]  WEIGHT UNIT: 40 LBS [18 KG] DRIVER: 13 LBS [5.9 KG] KEY: .9 LBS [.4 KG]
	MAX IN LINE	MAX		
	Ø 1.500 .375 X .250 KEY	Ø 1.875 .500 X .375 KEY		

<b>HOUSING MOUNTING PATTERN</b>				<b>COVER MOUNTING PATTERN</b>				<b>PARTIAL STROKE TESTING UNIT          COMMERCIAL GRADE</b>	
---------------------------------	--	--	--	-------------------------------	--	--	--	--	--

MAX Ø 7.000 3/4-10	MAX ON CENTER Ø 5.250 1/2-13	STD Ø 5.512 5/8-11	MIN Ø 4.500 5/8-11	MAX Ø 7.750 Ø .812	MAX ON CENTER Ø 5.813 Ø .688	STD Ø 5.512 Ø .688	MIN Ø 5.500 Ø .562	<b>DYNATORQUE</b> 1934 E. SHERMAN MUSKEGON, MI 49444-1824 (231) 739-1377 FAX (231) 739-4514 WWW.DYNATORQUE.COM	<b>DT21          D-STOP</b>
--------------------------	------------------------------------	--------------------------	--------------------------	--------------------------	------------------------------------	--------------------------	--------------------------	---	---------------------------------

50-41XX 8/12/03