


ITEM	DESCRIPTION
1	DT60 D-STOP
2	DRIVE COUPLING, D-STOP
3	SOCKET COVER
4	ENGAGEMENT KEY

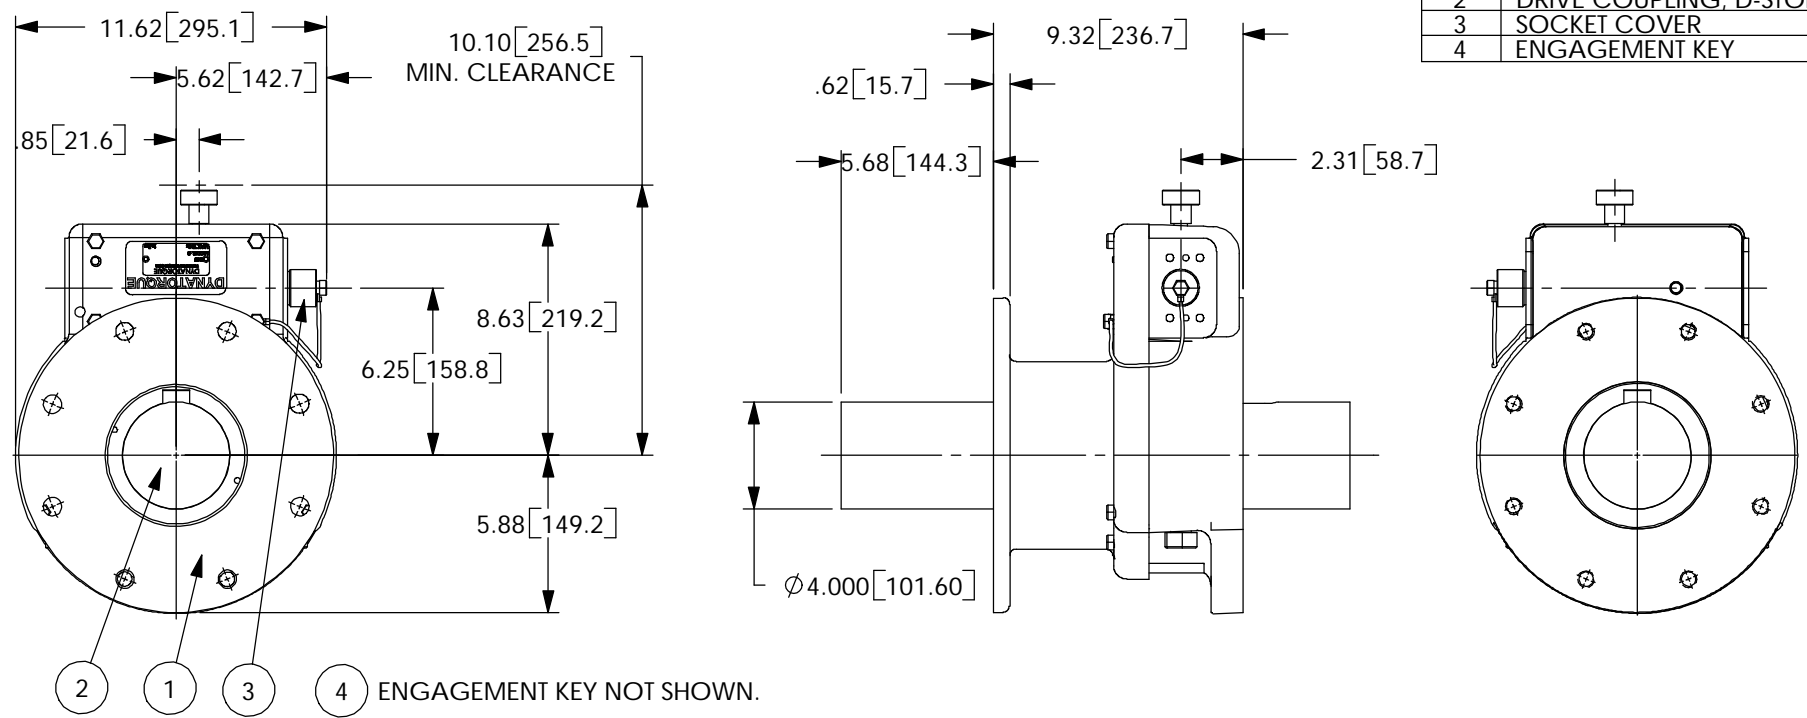

4 ENGAGEMENT KEY NOT SHOWN.

CONSULT FACTORY FOR SPECIAL CONFIGURATIONS.

STANDARD 20° TEST POSITION. SHOWN IN HOME POSITION. GREASED FOR LIFE. STANDARD STAINLESS STEEL SHAFT. STANDARD STAINLESS STEEL ENGAGEMENT KEY.	MAX DRIVE COUPLING BORE & KEY		CONSULT FACTORY FOR SPECIAL CONFIGURATIONS AND SWITCH MOUNTING OPTIONS	TORQUE: 180,000 IN LBS [20340 N-M] TEMPERATURE: -20° TO 150°F [-29° TO 66°C] WEIGHT UNIT: 140 LBS [63.6 KG] DRIVER: 67 LBS [30.5 KG] KEY: .9 LBS [.4 KG]
	MAX IN LINE	MAX		
	ϕ 2.125 .500 X .375 KEY	ϕ 3.125 .750 X .500 KEY		

HOUSING MOUNTING PATTERN				COVER MOUNTING PATTERN				PARTIAL STROKE TESTING UNIT COMMERCIAL GRADE	
---------------------------------	--	--	--	-------------------------------	--	--	--	---	--

MAX	MAX ON CENTER	STD	MIN	MAX	MAX ON CENTER	STD	MIN
ϕ 10.750 3/4-10	ϕ 10.750 3/4-10	ϕ 10.000 5/8-11	ϕ 7.000 5/8-11	ϕ 10.750 ϕ .812	ϕ 10.750 ϕ .812	ϕ 10.000 ϕ .688	ϕ 8.500 ϕ .688

DYNATORQUE
 1934 E. SHERMAN MUSKEGON, MI 49444-1824
 (231) 739-1377 FAX (231) 739-4514
 WWW.DYNATORQUE.COM

**DT60
D-STOP**

50-32XX 8/12/03