


ITEM	DESCRIPTION
1	DT7 D-STOP
2	DRIVE COUPLING, D-STOP
3	SOCKET COVER
4	ENGAGEMENT KEY

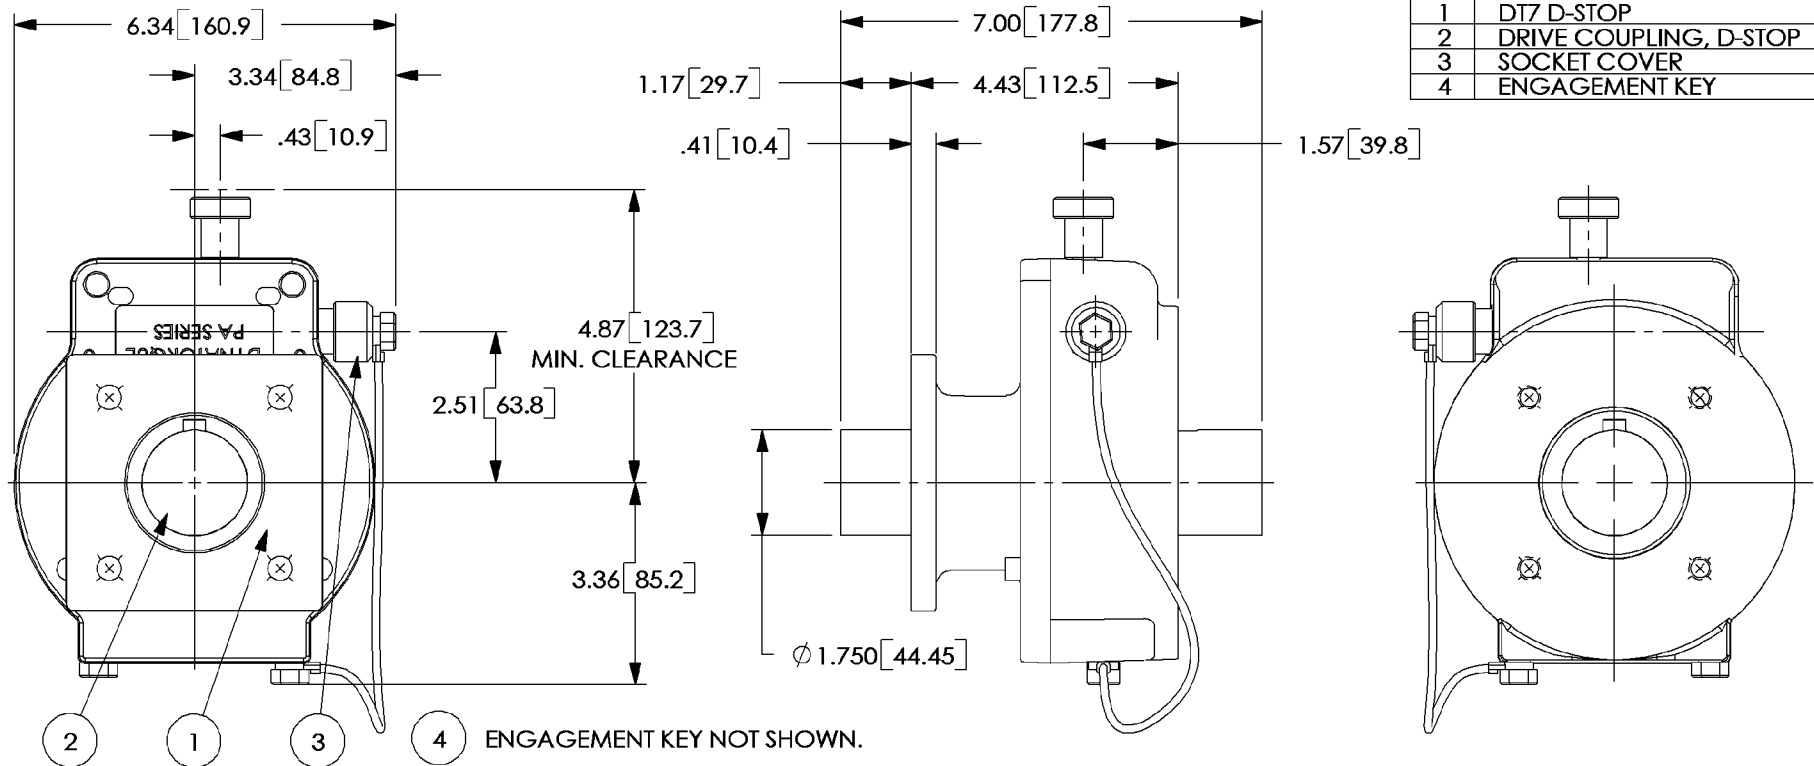

CONSULT FACTORY FOR SPECIAL CONFIGURATIONS.

STANDARD 20° TEST POSITION. SHOWN IN HOME POSITION.

GREASED FOR LIFE.

STANDARD STAINLESS STEEL SHAFT.

STANDARD STAINLESS STEEL ENGAGEMENT KEY.

MAX DRIVE COUPLING BORE & KEY

MAX IN LINE

MAX

Ø 1.000
.250 X .188 KEY

Ø 1.250
.375 X .250 KEY

CONSULT FACTORY FOR SPECIAL CONFIGURATIONS AND SWITCH MOUNTING OPTIONS

TORQUE: 10,000 IN LBS [1130 N-M]
TEMPERATURE: -20° TO 150°F [-29° TO 66°C]
WEIGHT
UNIT: 17 LBS [7.7 KG]
DRIVER: 2 LBS [.9 KG]
KEY: .6 LBS [.3 KG]

HOUSING MOUNTING PATTERN

COVER MOUNTING PATTERN

**MANUAL 1/4 TURN ACTUATOR
COMMERCIAL GRADE**

MAX	MAX ON CENTER	STD	MIN	MAX	MAX ON CENTER	STD	MIN
Ø 5.000 1/2-13	Ø 5.000 1/2-13	Ø 4.016 3/8-16	Ø 3.250 3/8-16	Ø 5.000 Ø .562	Ø 3.750 Ø .562	Ø 4.016 Ø .406	Ø 3.750 Ø .406

DYNATORQUE

1934 E. SHERMAN MUSKEGON, MI 49444-1824
(231) 739-1377 FAX (231) 739-4514
WWW.DYNATORQUE.COM

**DT7
D-STOP**